


MAHINDRA

T R A C T O R S



**6500
4WD**

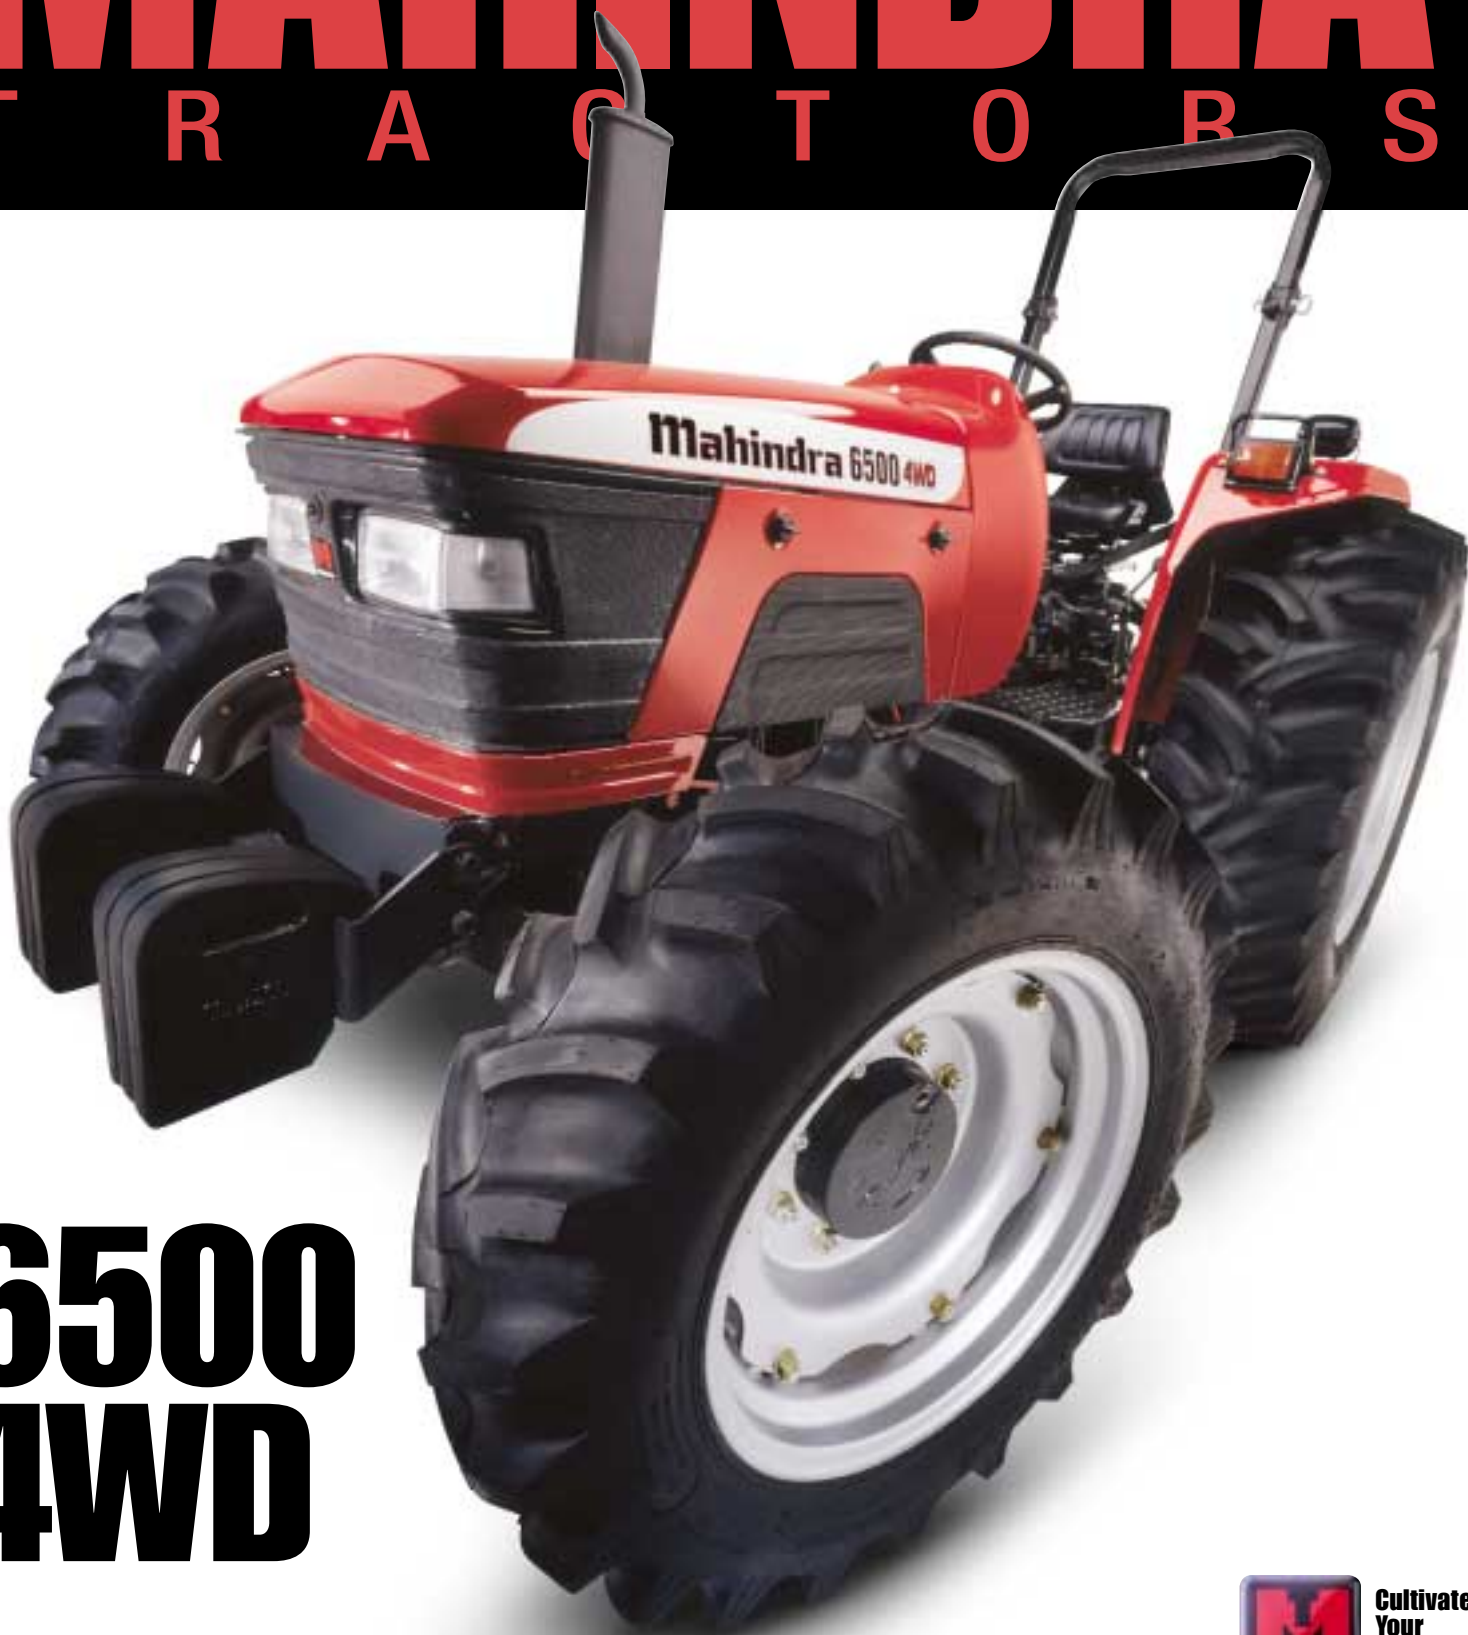

Cultivate
Your
Dreams™

MAHINDRA 6500 4WD



3-YEAR WARRANTY*

SUPERIOR PERFORMANCE:

- **Higher lift capacity:** Handle larger implements...Get work done a lot faster
- **Heavy-duty components:** Tough and rugged...Keep right on performing day after day
- **Sturdier chassis:** Greater stability...Keeps you safe while handling rigorous work
- **Heavier chassis:** Additional weight...Provides extra traction

6500 4WD SPECIFICATIONS

ENGINE – NE465

Type: Four stroke, direct injection, water cooled, diesel
Cylinders: 4
Maximum Engine HP (kW) @ RPM: 65 (48.4) @ 2200
Compression Ratio: 19.4:1
Displacement: Cubic inch (cc): 216 (3530)
Cylinder Sleeve: Wet replaceable

ELECTRICAL

Battery Capacity: 12 volt, 96 amp hours
Alternator: 12 volt, 36 amp

CLUTCH

Type: Dual

TRANSMISSION

Type: Forward-Reverse Synchro-Shuttle with full synchromesh
Number of Gears: 8 forward, 8 reverse

STEERING

Type: Hydrostatic power

BRAKES

Type: Wet disc

HYDRAULIC SYSTEM

Type: Open Center, full-live hydraulic with position and draft control
Pump Output (gallons/minute): 11
3-Point Linkage: Category 1 & 2 with telescopic check chains
Lift Capacity (lbs.): 3968
Auxiliary Remote Valves: 2 standard

PTO

Type: Independent
PTO RPM: 540 & 1000 @ 2100 engine rpm
Maximum PTO HP (kW): 57 (42.5)

OPERATING WEIGHT

Total (lbs.): 6280

DIMENSIONS

Overall Length Inches (mm): 150 (3810)
Overall Width Inches (mm):** 77 (1956)
Turning Radius Minimum Feet (mts): 11.8 (3.6)

Ag
Front: 11.2 x 24
Rear: 16.9 x 30

Industrial
Front: 12.5/80 x 18
Rear: 19.51 x 24



Cultivate Your Dreams™